LiuGong



Engine	Cummins F3.8
Net Power	84.5 kW
Rated Power	90 kW
Operating Weight	15,700 – 17,500kg
Emission Regulation	Tier 4f / Stage V
Bucket Capacity *	0.55 m3


915FCR EXCAVATOR


TOUGH WORLD. TOUGH EQUIPMENT.

915FCR SPECIFICATIONS>>>

ENGINE	
Emission Rating	Tier 4f / Stage V
Manufacturer	Cummins
Model	F3.8
Rated Speed	2,200 rpm
Engine output - net	84.5 kW (113.3 hp)
Peak Torque	500 N·m @ 1,500rpm
Number of cylinders	4
Displacement	3.8 L

UNDERCARRIAGE	
Shoe Width	500 mm
Number of Bottom Rollers per Side	7

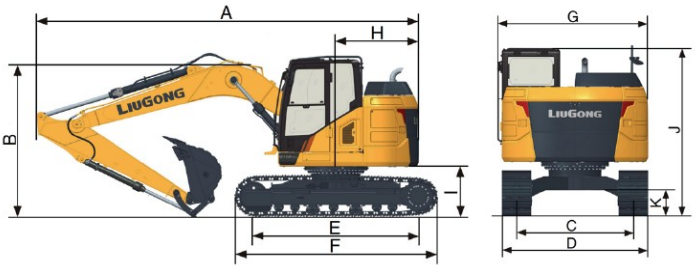

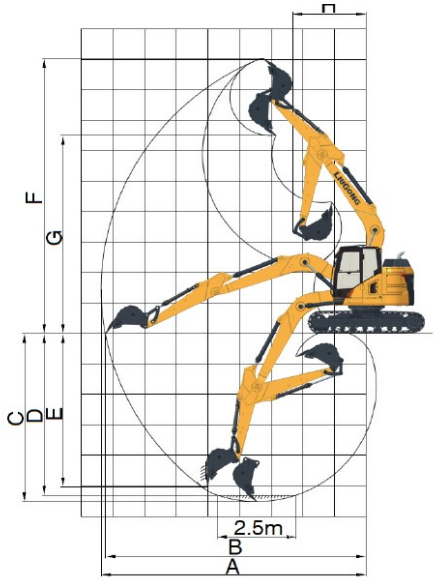

BOOM & ARM	
Boom Length	4,600 mm
Arm Length	2,500 mm

BUCKET PERFORMANCE *	
Std. Bucket Heaped Capacity (Reference)	0.55 m³

TRACK DRIVE	
Maximum Travel Speed	4.9 km/h
Drawbar Pull	122 kN

SERVICE CAPACITIES	
Fuel Tank	200 L
Engine Oil	12 L
Cooling System	20 L
Hydraulic Reservoir	100

HYDRAULIC SYSTEM	
Main Pumps Total Flow	2 x 117 L/min
Relief Pressure, main	34.3 / 37 MPa

SWING SYSTEM	
Swing Speed	11.3 rpm

WORKING RANGES	
A. Max. Digging Reach	8,365 mm
B. Max. Digging Reach on Ground	8,240 mm
C. Max. Digging Depth	5,540 mm
D. Max. Digging Depth, 2.5 m (8') level	5,325 mm
E. Max. Cutting Height	9,015 mm
F. Max. Dumping Height	6,485 mm
G. Min. Front Swing Radius	2,325 mm
Bucket Digging Force (ISO)	96.9 kN
Arm Digging Force (ISO)	70 kN

BUCKET IS NOT STANDARD *

MHVP PTY LTD
11 Des Young Dr, Moree, NSW, 2400
T: (02) 6752 4082 E: paul@mhvp.com.au

Specifications and designs are subject to change withput notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.