LiuGong



Engine	Perkins 404D-22
Gross Power	35.7 kW (48 hp / 49 ps) @ 2,600 rpm
Net Power	34 kW (45.6 hp /46 ps) @ 2,600 rpm
Breakout Force	20.4 kN
Rated Operating Capacity	795 kg
Bucket Capacity	0.4 m^3
Operating Weight	2,950 kg

365B
SKID STEER LOADER

TOUGH WORLD. TOUGH EQUIPMENT.

365B SPECIFICATIONS >>>

ENGINE	
Emission Regulation	Tier 3 / Stage IIIA
Make	Perkins
Model	404D-22
Gross Power	35.7 kW (48 hp / 49 ps) @ 2,600 rpm
Net Power	34 kW (45.6 hp / 46 ps) @ 2,600 rpm
Peak Torque	143 N · m @ 1,800 rpm
Number of Cylinders	4
Displacement	2.216 L
Cooling Type	Water

ELECTRICAL SYSTEM	
System Voltage	12 V
Alternator Output	85 amps

CHAIN TANK	
Drive Chain Size	80 HS

TIRES	
Ply Type	Vacuum
Tire Size	10-16.5-10PR TI200
Ply Rating	10

HYDRAULIC SYSTEM	
System Type	Open
Standard Flow	72.8 L/min
Traveling Hydrostatic Pressure	35 Mpa
Working Hydrostatic Pressure	21 Mpa
Hydraulic Cycle Time, total	7.9 s
Raise	3.9 s
Dump	2.1 s
Lower (float down)	1.9 s

OPERATING WEIGHT	
Operating Weight	2,950 kg


PERFORMANCE	
Static Tipping Load	1,590 kg
Rated Operating Capacity	795 kg
Boom Breakout Force	18.5 kN
Bucket Breakout Force	20.4 kN
Dump Clearance at Full Height Discharge	2,220 mm
Dump Reach at Full Height Discharge	540 mm
Maximum Dump Angle at Full Height	40°
Maximum Hinge Pin Height	2,923 mm
Bucket Rollback at Ground Level	30°
Ground Clearance	204 mm
Angle of Departure	26°
Front Clearance Radius with Bucket	1,800 mm


SERVICE CAPACITIES	
Fuel Tank	100 L
Engine Oil	7 L
Cooling System	13 L
Hydraulic Reservoir	52 L
Hydraulic System Total	70 L
Chain Tanks, Each	8 L

OPTIONAL ATTACHMENTS	
4 in 1 Bucket – 0.4 m^3	Auger
Rock Bucket – 0.4 m^3	Snow Blade
Scrap Bucket – 350 to 650 mm	Pick - up Sweeper
Hydraulic Hammer	Hydraulic Shear
Fork	Lift Boom

STANDARD EQUIPMENT
General Bucket –0.4 m^3
Control Safety Interlock
Boom Interlock
Quick Coupler
Open ROPS/FOPS Cab
Flow Standard-69 L/min

OPTIONAL EQUIPMENT
Enclosed ROPS/FOPS Cab with AC
Solid Tire
Tire Chains
Heater
A/C

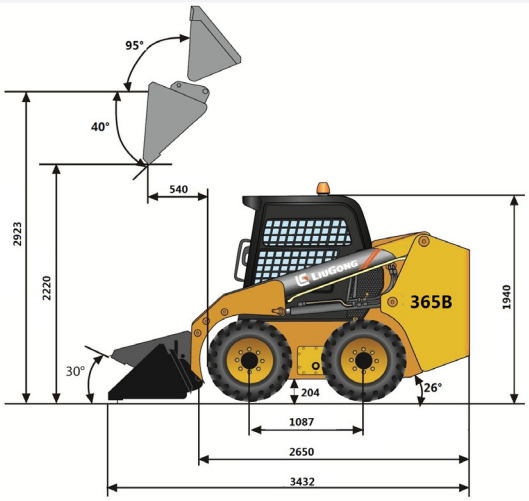

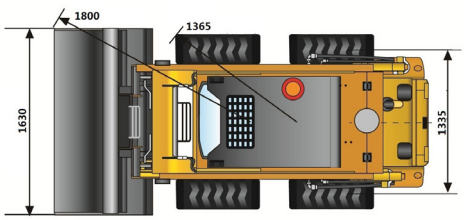

MHVP PTY LTD
11 Des Young Drive, Moree, NSW, 2400
Call us on: (02) 6752 4082
E: paul@mhvp.com.au

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region.
Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.