LiuGong



Engine	Kubota D1105-E4B
Gross Power	18.5 kW (24.8 hp / 25.2 ps) @ 3,000 rpm
Net Power	17 kW (22.8 hp /23.1 ps) @ 3,000 rpm
Breakout Force	9 kN
Rated Operating Capacity	380 kg
Bucket Capacity	0.17 m^3
Operating Weight	1,440 kg

335C
SKID STEER LOADER

TOUGH WORLD. TOUGH EQUIPMENT.

335C SPECIFICATIONS >>>

ENGINE	
Emission Regulation	CN IV
Manufacturer	Kubota
Model	D1105-E4B
Gross Power	18.5 kW (24.8 hp / 25.2 ps) @ 3,000rpm
Net Power	17 kW (22.8 hp / 23.1 ps) @ 3,000rpm
Peak Torque	71.5 N·m @ 2,200rpm
Number of Cylinders	3
Displacement	1.123L
Cooling Type	Water

ELECTRICAL SYSTEM	
System Voltage	12 V
Alternator Output	65 amps

CHAIN TANK	
Drive Chain Size	60 HS

TIRES	
Ply Type	Solid
Tire Size	570x160
Ply Rating	/

HYDRAULIC SYSTEM	
System Type	Open
Standard Flow	36 L/min
Traveling Hydrostatic Pressure	25 MPa
Working Hydrostatic Pressure	21 MPa
Hydraulic Cycle Time, total	6.6 s
Raise	3.1 s
Dump	2.1 s
Lower (float down)	1.4 s

OPERATING WEIGHT	
Operating Weight	1,440 kg


PERFORMANCE	
Static Tipping Load	760 kg
Rated Operating Capacity	380 kg
Boom Breakout Force	9 kN
Bucket Breakout Force	8.15 kN
Dump Clearance at Full Height Discharge	1,877 mm
Dump Reach at Full Height Discharge	435 mm
Maximum Dump Angle at Full Height	34°
Maximum Hinge Pin Height	2,445 mm
Bucket Rollback at Ground Level	22°
Ground Clearance	166 mm
Angle of Departure	24.5°
Front Clearance Radius with Bucket	1,566 mm


SERVICE CAPACITIES	
Fuel Tank	25 L
Engine Oil	4 L
Cooling System	7 L
Hydraulic Reservoir	20 L
Hydraulic System Total	25 L
Chain Tanks, Each	5 L

OPTIONAL ATTACHMENTS	
4 in 1 Bucket – 0.4 m^3	Auger
Rock Bucket – 0.4 m^3	Snow Blade
Scrap Bucket – 350 to 650 mm	Pick - up Sweeper
Hydraulic Hammer	Hydraulic Shear
Fork	Lift Boom

STANDARD EQUIPMENT
General Bucket – 0.4 m^3
Control Safety Interlock
Boom Interlock
Quick Coupler
Open ROPS/FOPS Cab
Flow Standard – 69 L/min

OPTIONAL EQUIPMENT
Enclosed ROPS/FOPS Cab with AC
Solid Tire
Tire Chains
Heater
A/C

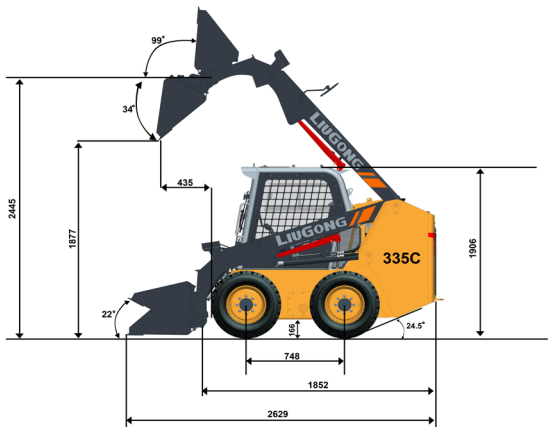

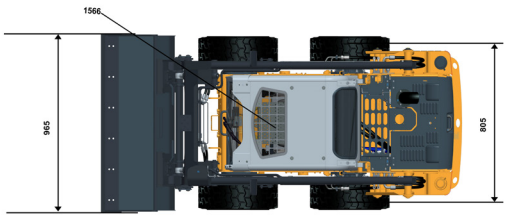

MHVP PTY LTD
11 Des Young Drive, Moree, NSW, 2400
Call us on: (02) 6752 4082
E: paul@mhvp.com.au

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region.
Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.