| | |
|---|---|
| **Engine** | Yanmar 4TNE98-BQFLCC / 3.32 L |
| **Fuel Type** | Diesel |
| **Capacity @ 500 mm LC** | 3,500 kg |

# CLG2035H

**DIESEL**
**PNEUMATIC TIRE FORKLIFTS**
**C SERIES**


LiuGong





TOUGH WORLD. TOUGH EQUIPMENT.

# CLG2035H SPECIFICATIONS >>>

| | | | | | |
|---|---|---|---|---|---|
| General | Model | 1 | | | CLG2035H |
| | Power Type | 2 | | | Diesel |
| | Base Capacity | 3 | @ rated load center | kg | 3,500 |
| | Load Center | 4 | | mm | 500 |
| Weights | Service Weight | 5 | unloaded | kg | 5,400 |
| | Axle Load | 6 | loaded / unloaded, front | kg | 7,304 / 1,920 |
| | | 7 | loaded / unloaded, rear | kg | 996 / 2,880 |
| Tires | Tyre Type | 8 | | | Pneumatic |
| | Wheels | 9 | front / rear | | 2 / 2 |
| | Wheelbase | 10 | | mm | 1,700 |
| | Tyre Size | 11 | front | | 28x9-15-14PR |
| | | 12 | rear | | 6.50-10-10PR |
| | Tread Width | 13 | front / rear | | 1,000 / 992 |
| Mast | Max. Fork Height | 14 | with std 2-stage mast | mm | 3,000 |
| | Freelift | 15 | with std 2-stage mast | mm | 145 |
| | Height, Upright Lowered | 16 | with std 2-stage mast | mm | 2,195 |
| | Height, Upright Extended | 17 | with std 2-stage mast | mm | 4,088 |
| | Mast Tilt, Fwd/Back | 18 | with std 2-stage mast | deg | 6° / 12° |
| | Carriage | 19 | width | mm | 1100 |
| | Fork Spread | 20 | minimum / maximum | mm | 272 / 1,072 |
| | Fork Dimensions | 21 | T x W x L | mm | 50 x 122 x 1,070 |
| Chassis | Length to Fork Face | 22 | with std 2-stage mast | mm | 2,710 |
| | Overall Width | 23 | | mm | 1,225 |
| | Overhead Guard Height | 24 | | mm | 2,200 |
| | Turning Radius | 25 | minimum outside | mm | 2,435 |
| | Fork Overhang | 26 | with std 2-stage mast | mm | 477 |
| | Right Angle Stack | 27 | add load length and clearance | mm | 4,192 |
| | Ground Clearance | 28 | minimum loaded | mm | 140 |
| | | 29 | center of wheelbase | mm | 165 |
| Performance | Travel Speed | 30 | loaded / unloaded | km/h | 18.5 / 19 |
| | Lift Speed | 31 | loaded / unloaded | m/s | 0.53 / 0.59 |
| | Lower Speed | 32 | loaded / unloaded | m/s | 0.50 / 0.40 |
| | Max. Drawbar Pull | 33 | loaded | kg | 1,900 |
| | Max. Gradeability | 34 | loaded / unloaded | % | 20 /31 |
| Systems | Brakes | 35 | service | | Foot / Hyd |
| | | 36 | parking | | Hand / Mech |
| | Engine | 37 | manufacturer | | Yanmar |
| | | 38 | model | | 4TNE98-BQFLCC |
| | | 39 | emission compliance | | EU Stage IIIA |
| | | 40 | cylinders | | 4 |
| | | 41 | displacement | liter | 3.32 |
| | | 42 | rated power | kW/rpm | 42.1 / 2,300 |
| | | 43 | max. torque | N·m/rpm | 196.3 / 1,700 |

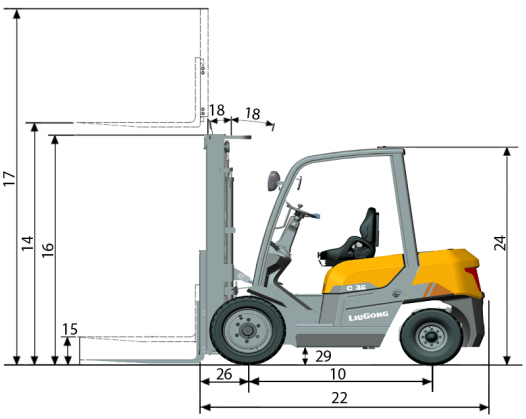

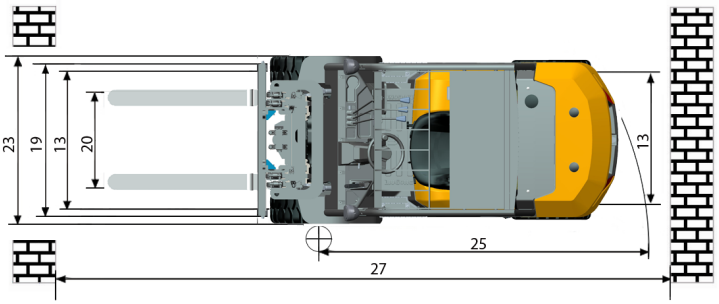
MHVP PTY LTD
11 Des Young Drive, Moree, NSW, 2400
Call us on: (02) 6752 4082
E: paul@mhvp.com.au

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.