LiuGong



Engine	Cummins QSK19
Rated Power	455 kW (610 hp / 619 ps) @ 2,000 rpm
Net Power	421 kW (565 hp / 572 ps) @ 2,000 rpm
Peak Torque	2,696 N·m
Blade Capacity	19.2 m^3
Operating Weight	70,800 kg

LD60D BULLDOZER

TOUGH WORLD. TOUGH EQUIPMENT.

LD60D SPECIFICATIONS >>>

ENGINE	
Emissions Rating	Tier 3 / Stage III
Manufacturer	Cummins
Model	QSK19
Rated Power	455 kW (610 hp / 619 ps) @ 2,000 rpm
Net Power	421 kW (565 hp / 572 ps) @ 2,000 rpm
Peak Torque	2,696 N·m
Number of Cylinders	6
Aspiration	Turbocharged-CAC
Displacement	19 L

TRANSMISSION	
Transmission Type	Power shift
Maximum Forward Speed, low/high	9.4/12.0 km/h
Maximum Reverse Speed, low/high	11.7/14.9 km/h
Number of Gears, fwd	3
Number of Gears, rev	3
Steering Type	Two-speed steering

ELECTRICAL SYSTEM	
System Voltage	24 V
Battery Rating	120 Amp-hr
Battery CCA	1,000 Amp-hr

UNDERCARRIAGE	
Track Type	Single grouser, sealed and lubricated
Shoe Width	610 mm
Number of Shoes (each side)	39
Number of Carrier Rollers (each side)	2
Number of Track Rollers (each side)	7
Ground Pressure	139 kPa
Grouser Height	93 mm


OPERATING WEIGHT	
Operating Weight	70,800 kg


BLADE PERFORMANCE	
Blade Type	Semi-U
Blade Capacity	19.2 m^3
Blade Digging Depth	830 mm
Blade Lift Height	1,530 mm
Blade Maximum Tilt	1,150 mm

RIPPER PERFORMANCE	
Ripper Type	Single-shank ripper
Maximum Clearance Under Tip	1,000 mm
Ripper Digging Depth	1,670 mm

SERVICE REFILL CAPACITIES	
Fuel Tank	1,350 L
Engine Oil	59.3 L
Cooling System	54 L
Hydraulic Oil Tank	270 L
Transmission System	340 L
Final Drives (each side)	85 L

DIMENSIONS	
A Overall Length	10,410 mm
B Height to Top of ROPS	4,545 mm
C Track Length on Ground	3,610 mm
D Blade Height	2,230 mm
E Blade Width	4,778 mm
F Track Gauge	2,500 mm
G Width over Track	3,110 mm

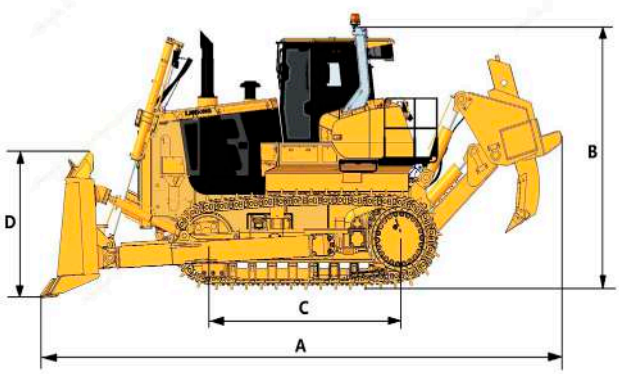

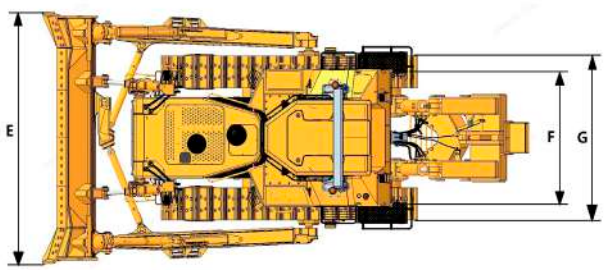

MHVP PTY LTD
11 Des Young Drive, Moree, NSW, 2400
Call us on: (02) 6752 4082
E: paul@mhvp.com.au

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.
LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.