




Din-rail AC Power Meter



Power Meter

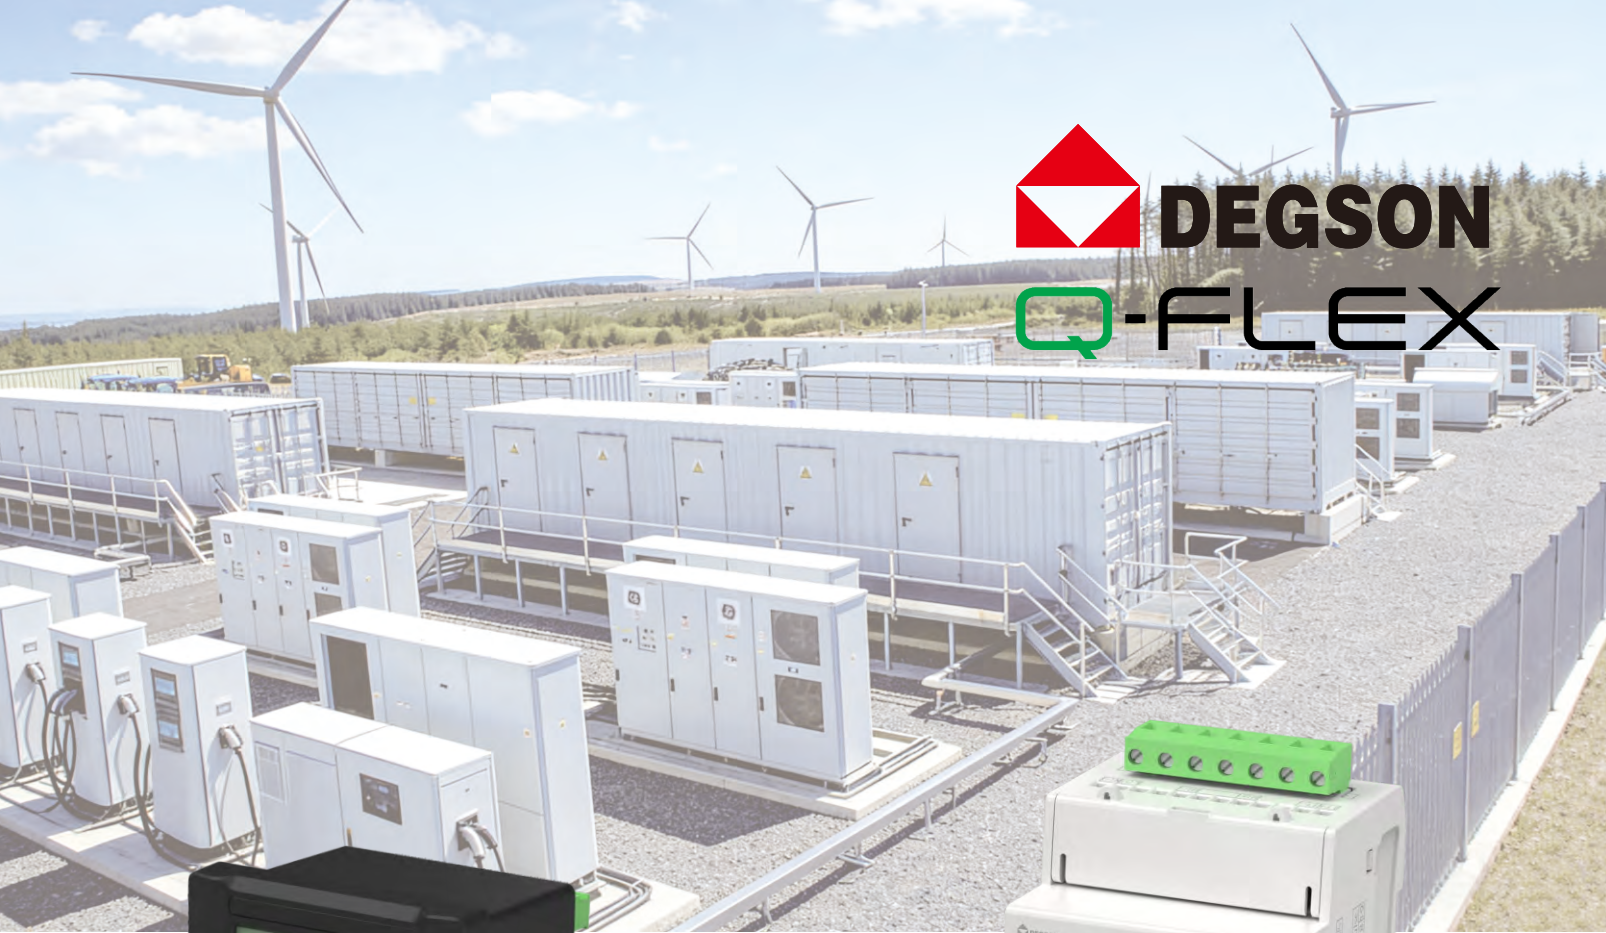

DEMR-AC1

Single Phase Power Meter

- ✓ Max 80A direct connection or CT connection
- ✓ Accuracy of measuring Class 1/Class B
- ✓ Support Bi-directional metering of multi-rate
- ✓ Modbus RTU (RS485)
- ✓ Complete approval, CE, MID



DEMR-AC3

Three Phase Power Meter

- ✓ Max 100A direct connection or CT connection
- ✓ Accuracy of measuring Class 0.5/Class C
- ✓ Support Bi-directional metering of multi-rate
- ✓ Modbus RTU (RS485)
- ✓ Complete approval, CE, MID



DEMR-AC1 系列 Series



DEMR-AC1
MID 1-Phase
AC 220V/230V
Direct connect up to 80A



DEMR-AC1-CT-D10
1-Phase
AC 220V/230V
Equipped with mACT, 80A



DEMR-AC1-CT-D16
MID 1-Phase
AC 220V/230V
Equipped with mACT, 120A



DEMR-AC1-CT-D24
1-Phase
AC 220V/230V
Equipped with mACT, 200A



DEMR-AC1-CT-D36
1-Phase
AC 220V/230V
Equipped with mACT, 300A

DEMR-AC3 系列 Series



DEMR-AC3
MID 3-Phase
3×220/400V
Direct connect up to 80A Class C/100A Class B



DEMR-AC3-CT
MID 3-Phase
3×230/400V
5A CT connection



DEMR-AC3-CT-D10
3-Phase
3×230/400V
Equipped with mACT,3*120A



DEMR-AC3-CT-D16
MID 3-Phase
3×230/400V
Equipped with mACT,3*80A




DEMR-AC3-CT-D24
3-Phase
3×230/400V
Equipped with mACT,3*200A



DEMR-AC3-CT-D36
3-Phase
3×230/400V
Equipped with mACT,3*300A



Din-rail DC Power Meter

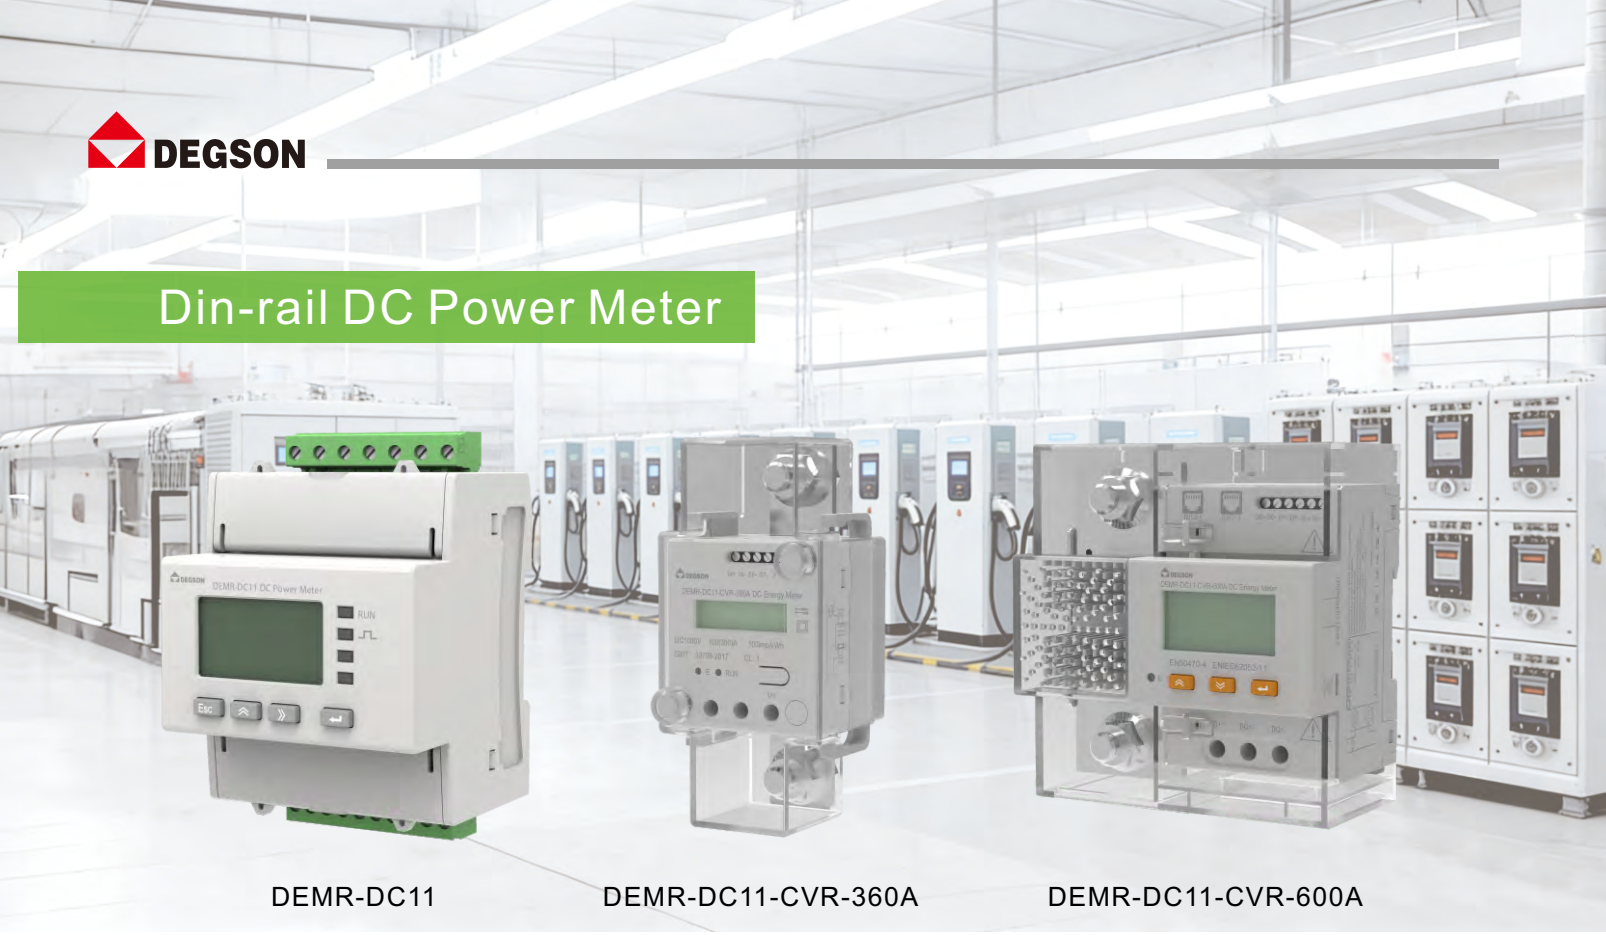

DEMR-DC11

DEMR-DC11-CVR-360A

DEMR-DC11-CVR-600A

DC Power Meter

- ✓ Current shunt Integrated or connect external Shunt/Hall transducer
- ✓ Measuring range DC300A, DC600A, DC 0~1000V
- ✓ Accuracy of measuring Class 1/Class B
- ✓ Modbus RTU (RS485)
- ✓ Complete approval, CE, MID



DEMR-DC11

Din-rail DC

Single input

Connect external Shunt/
Hall transducer



DEMR-DC12

Din-rail DC

Double input

Connect external Shunt/
Hall transducer



DEMR-DC11
-CVR-360A

Din-rail DC

360A

Current shunt Integrated



DEMR-DC11
-CVR-600A

Mid Din-rail DC

600A

Current shunt Integrated



DEMR-DC11-EX

Extension display module

Combine with
DEMR-DC11-CVR



Panel AC Power Meter



DEMP-AC3-D72-E

DEMP-AC3-D96-E

DEMP-AC3-D96

AC Power Meter

- ✓ Two size with square design, 75*75mm , 96*96mm
- ✓ Accuracy of measuring Class 0.5S/Class C
- ✓ Modbus RTU (RS485), optional with WiFi, LoRa, 4G, NB communication
- ✓ Tailor for electric energy collection and monitoring with rich features
- ✓ Provide with economic type
- ✓ Complete approval, CE



DEMP-AC3-D72-E

3-Phase multifunction

AC 100V, 400V
3×57.7V/100V(100V)
3×220V/380V(400V)

Boundary dimensions:75*75

Economic type



DEMP-AC3-D96-E

3-Phase multifunction

AC 100V, 400V
3×57.7V/100V(100V)
3×220V/380V(400V)
3×380V/660V(660V)

Boundary dimensions:75*75

Economic type



DEMP-AC3-D96

3-Phase multifunction

AC 100V, 400V
3×57.7/100V
3×63.5/110V
3×230/400V
3×400/690V

Boundary dimensions:75*75

Function type



Tel: +65-60190748

E-mail: sale@degson.com

www.degson.com



DEGSON website



LINKEDIN

The catalog is for reference purpose only and details are
base on company's specifications



Avantintie 7, FI-21420 Lieto, Finland

+358 2 4894 500

info@q-flex.fi | q-flex.fi