

Corrugated box conversion, presented the right way.



Cardboard

Solutions for all types of corrugated cardboard

4 Colors

High quality flexographic printing

CMYK


150 pcs/min

Design speed on selected models

BS-BT is an automatic printing slotting die cutting stacker machine built for integrated carton converting, combining automatic feeding, flexo printing, slotting, die cutting, and stacking in a single production line.

RAW MATERIAL

corrugated board and flute compatibility

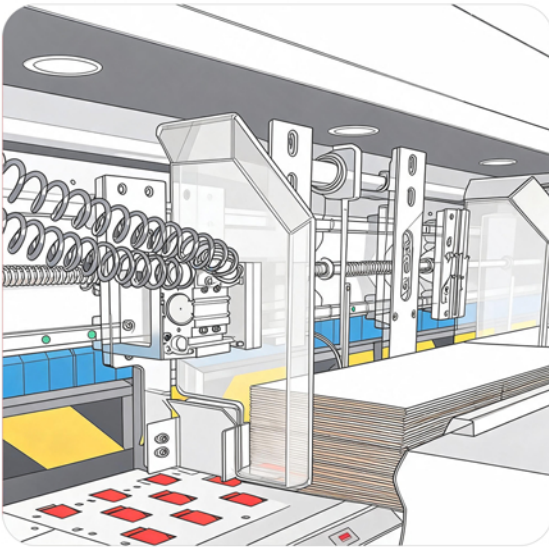

The BS-BT line is presented here for single-wall corrugated cardboard sheets, also called 3-ply board: one fluted medium between two linerboards. This is the standard format for a wide range of shipping cartons, printed transport boxes, and many die-cut corrugated packs.



*supports 3-ply single-wall corrugated sheets across common flute profiles depending on box specification and production requirements

Maximum Thickness is **13mm**

FLUTE TYPE	APPROX. THICKNESS	TYPICAL USE VALUE
A flute	About 5 mm	High cushioning and good stacking support
B flute	About 3 mm	Good crush resistance and common transit packaging
C flute	About 4 mm	Balanced strength and cushioning for general use
E flute	About 1.5 mm	Finer profile with a smoother printable surface
F flute	About 1 mm	Compact, fine flute for light retail-style packs

Corrugated Flute Types

E Flute
1.1-2 mm



B Flute
2.5-3 mm



C Flute
3.5-4 mm



A Flute
4.5-5 mm



BC Flute
6-7 mm



AB Flute
8-9 mm



BE Flute
3.6-5 mm



PRINTING


Flexographic printing process for corrugated packaging

Vacuum Printing Unit

- 200LPI-300LPI (Metal Anilox Roller), can be customized by details requirements
- The gap between printing rollers can be adjusted by PLC and touch screen.
- Automatic reposition after washing the printing template during the printing procession.
- Automatic pneumatic lifting gear working with feeding system
- Printing roller with plate hanging groove, with cushion

Flexographic printing is a relief printing process using flexible plates mounted on rotating cylinders. Ink is measured by the anilox roller, transferred to the printing plate, and then applied onto the corrugated sheet as it moves through the press.

Customizable Anilox Rollers

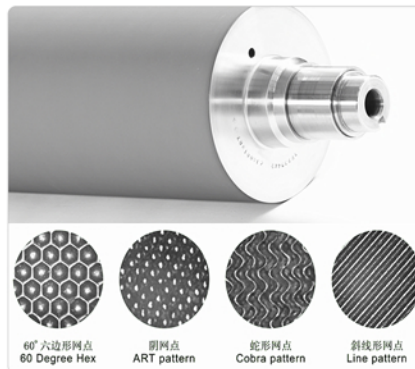

Printing Plates Used



MACHINE SECTIONS

Feeding, slotting, and die cutting architecture

Lead Edge Feeding Unit

- Lead-edge feeding concept for stable sheet entry.
- Four-row wheel design makes paper feeding more stable
- Gap adjustment and controlled feeding pressure to protect board integrity.




Slotting Unit

- Creasing and slotting preparation for box forming accuracy.
- PLC-guided movement of knives and slotting holders.
- Touch-screen phase and gap adjustment for setup efficiency.



Rotary Die Cutting

- Motor (Touch screen) to adjust the rotary die cutting phase
- Suitable for repeatable shaped production on corrugated sheets.
- Can be presented with custom cylindrical die tooling examples.

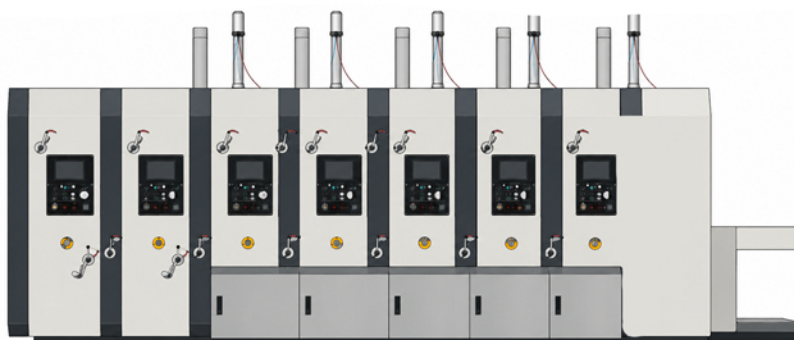

SPECIFICATIONS

BS-BT technical information

MODEL	BS-BT920	BS-BT922	BS-BT1224	BS-BT1228	BS-BT1428
Maximum paper size	920x2000mm	920x2200mm	1200x2400mm	1200x2600mm	1400x2600mm
Minimum paper size	300x680mm	300x680mm	350x680mm	350x680mm	430x680mm
Maximum printing size	920x1800mm	920x2000mm	1200x2200mm	1200x2400mm	1400x2400mm
Design speed of machine	150pcs/min	150pcs/min	150pcs/min	150pcs/min	150pcs/min
Economic speed of machine	0-120pcs/min	0-120pcs/min	0-120pcs/min	0-120pcs/min	0-120pcs/min
Printing paper type	A.B.C.E.A/B.B/C and A/B/C flute (The maximum gap is 13mm)				
Printing plate thickness(plus cushion)	4.8-7.2mm				
Diameter of printing roller(including printing plate)	300mm	300mm	405mm	405mm	480mm
Standard printing thickness	1.5-12mm				

ADDITIONAL INFORMATION

Other architecture

Die Cutting Molds

Rotary die cutting for corrugated packaging commonly uses cylindrical wooden dies carrying the cutting rule pattern. This makes it easier for a client to understand that the machine supports repeated industrial shapes, not only straight-line cutting.




Full PLC Control

- Full control of your machine
- Simple and intuitive set-up
- Color touch screen



European Parts

The electrical section is equipped with high-grade European components from Schneider, and Siemens, ensuring stable performance, reliability, and long-term durability.

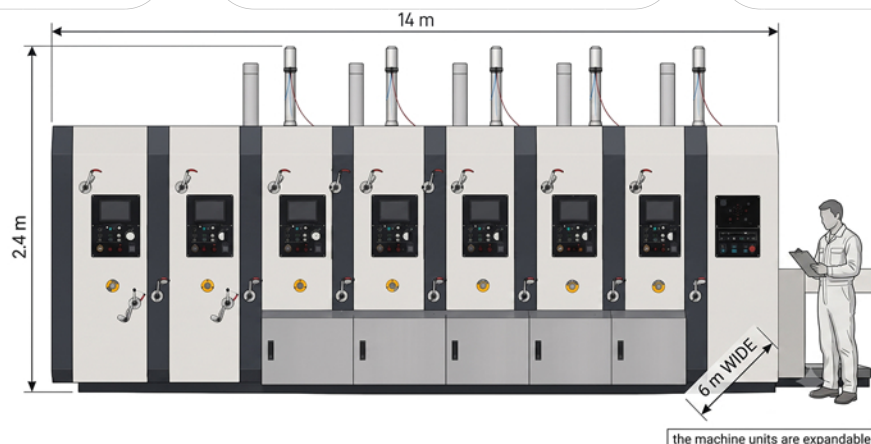

the machine units are expandable

CONTACT

BOSON MACHINERY GROUP CO. LTD

Address

105 West Side of the National
Road, Xiazhuang Village West,
Dongguang County, Cangzhou
City, Hebei Province, China

Website

www.bosonterapack.com

Confidence - Integrity - Service

B-OSON

TeraPack



Precision in Every Piece