

# Ao SQUARE PADS

Corner strokes aggressively remove stock in channels, inside corners or hard to reach areas. Ideal for shaping, smoothing or removing inside corner welds, material layers wear away to expose fresh cutting surfaces, prolonging life.

- ▶ Sturdy design promotes aggressive removal
- ▶ Intermittent shape allows extra visibility
- ▶ Reach difficult channels and geometries
- ▶ Continually exposed layers for long life



Size	Thickness	Eyelet	Max RPM	Std. Pkg.	60	80	120
1-1/2"	3/8"	8-32	18,000	100	13998	13999	14001
1-1/2"	1/2"	1/4"-20	18,000	100	14009	14010	14012
1-1/2"	3/4"	1/4"-20	18,000	100	14020	14021	14023
2"	3/8"	1/4"-20	12,000	100	14042	14043	14045
2"	1/2"	1/4"-20	12,000	100	14053	14054	14056
3"	1/2"	1/4"-20	9,000	100	14097	14098	14100


● Ferrous   ● Non-Ferrous   ● Stainless   ● Exotic Alloys   ○ Plastics   ○ Composites

## EYELET MANDRELS



Overall Length	Shank Diameter	Fits Thread	Std. Pkg.	Part #
3"	1/4"	3-48	1	<b>21316</b>
3"	1/4"	8-32	1	<b>12218</b>
3"	1/4"	1/4"-20	1	<b>12219</b>
6"	1/4"	1/4"-20	1	<b>42815</b>

## MANDREL EXTENSIONS

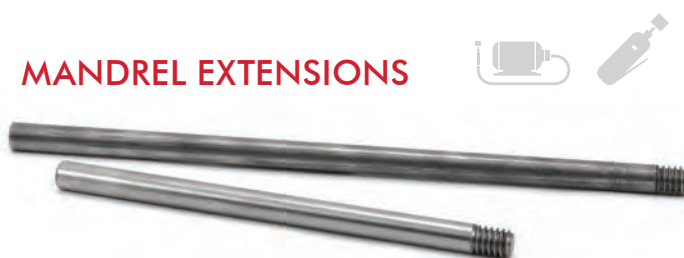

Overall Length	Shank Diameter	Fits Thread	Std. Pkg.	Part #
4"	1/4"	1/4"-20	1	<b>39207</b>
6"	1/4"	1/4"-20	1	<b>39208</b>
8"	1/4"	1/4"-20	1	<b>39209</b>