



Cutout dimension see sheet 2;
Forces see sheet 3.

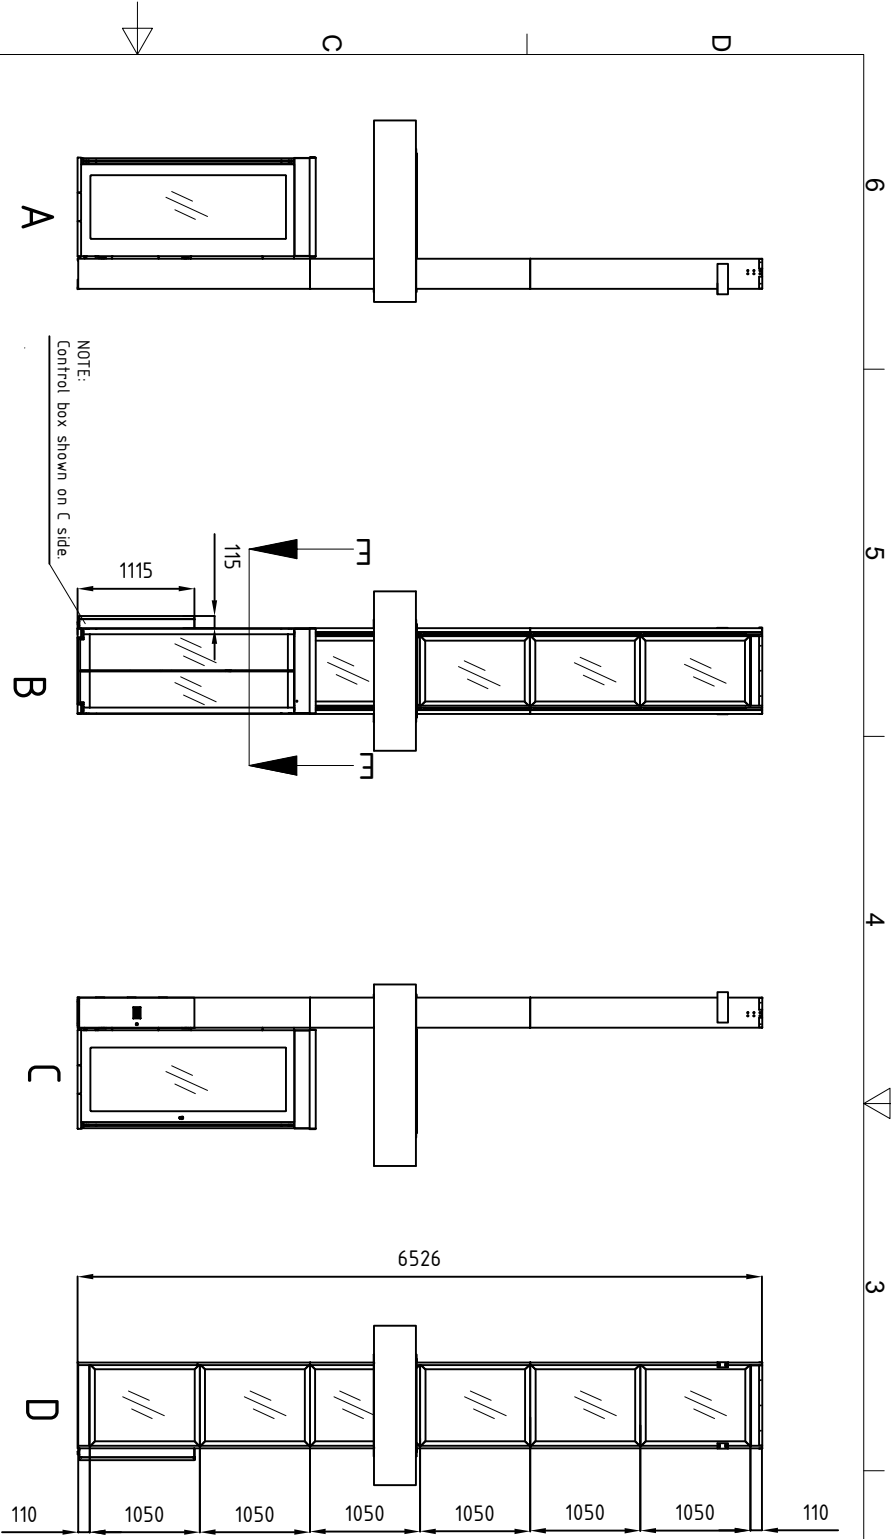

NOTE:
Control box shown on C side.

E-E

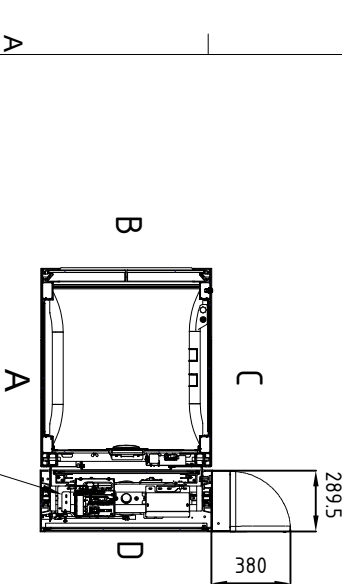

Drive tower position

Capacity: 350 Kg
Maximum travel height: 4270m
Main Line: VAC 1x230 50-60HZ 32A. Active phone line. Both should be available at the first/main landing.
NOTE: A lift featuring a frequency converter cannot be directly connected to a RCD.
Ambient temperature: -10°C to +40°C;
Humidity: Less than 95% RH, non-condensing.
This lift is for indoor use only, it should be protected from weather.


ASCENDA
This document is the property of Cda Lift AB
It must not be reproduced or
distributed to any third party or used in any unauthorized manner
without written consent.

Resp Yan Designer
General Tolerance
SS-ISO 2768-1
M

TFL Principal drawing
All dimensions are in mm.

Scale
Filename
Date 2024-09-27
Doc number
Page1
Rev.

Cutout sizes

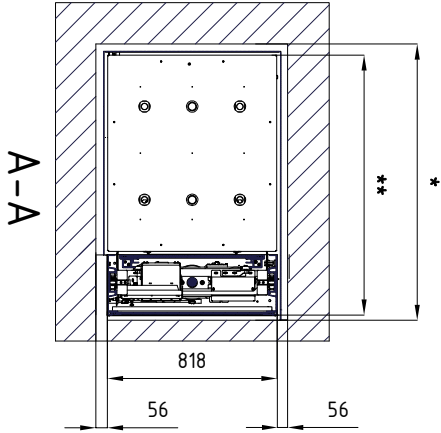

Hatch shown

Minimum travel height: 2300
Maximum travel height: 4270

Minimum overhead :2300

Minimum clear height: 2150

Size	*(mm)	** (mm)
S (600x700)	1132	1056
M (800x700)	1332	1256
L (1000x700)	1532	1456

NOTE: Standard hatch floor insert is suitable for floors between 100–450 mm thick.

NOTE: Shown on the A side but can also installed on the C side, see page 1.

ASCENDA

This document is the property of TFL Ltd. All rights reserved. It is to be used for the project and location specified only. If used for any other project or location without written consent.

Resp Man

Designer

General Tolerance

SS-ISO 2768-1

M

TFL Principal drawing

All dimensions are in mm.

Scale


Filename

Doc number


Date 2024-09-27

Rev.

A-A (1 : 15)

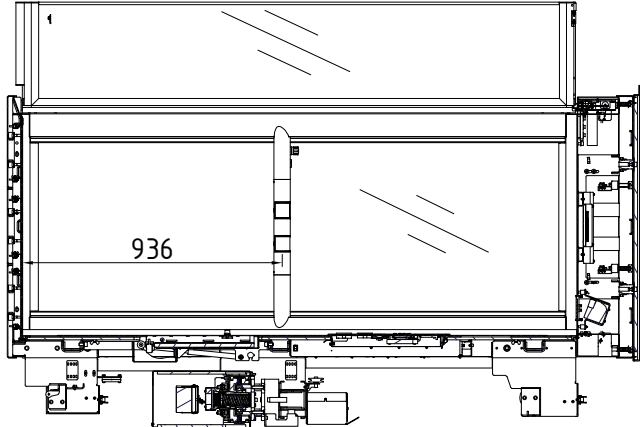


A

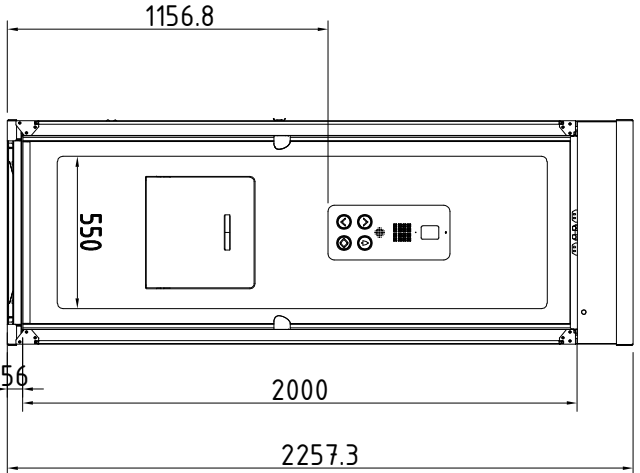


A

B-B (1 : 15)

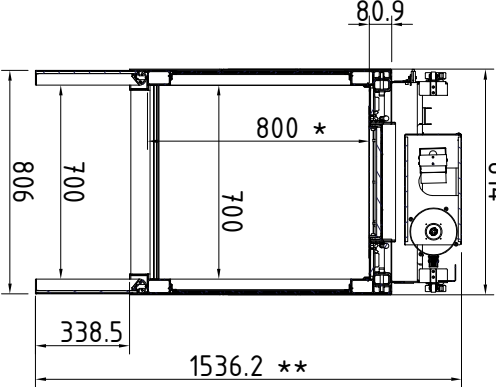

B

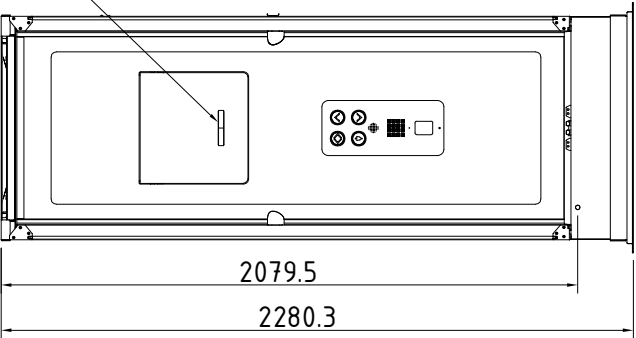


B

Fold down seat handle

Hatch cover shown

Open door button

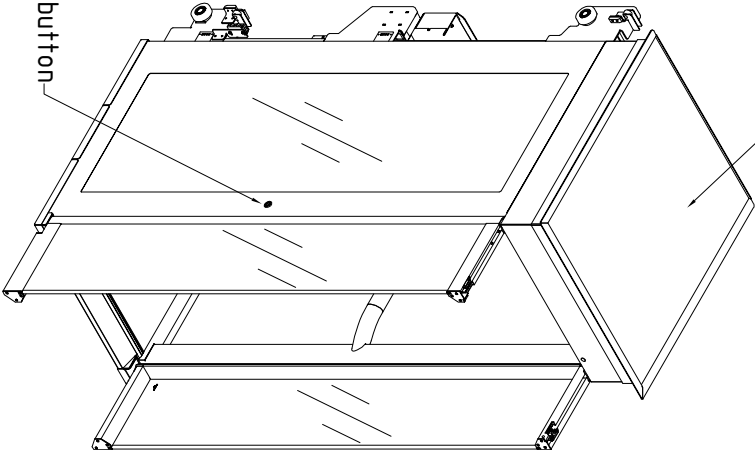

Cabin size		
Size	* (mm)	** (mm)
S (600X700)	600	1336.2
M (800X700)	800	1536.2
L (1000X700)	1000	1736.2

When folded down the seat dimensions are: 400 X 315 (W XD)
Seat maximum load capacity is 150kg

ASCENDA

General Tolerance

SS-ISO 2768-1

M

Rep. Plan

Designer

TFL Principal drawing

Scale

File name

Date 2024-12-08


Doc number

Page 4

Rev.

This document is the property of China Lift All and must not be reproduced, disclosed to any third party or used in any unauthorized manner without written consent.



Cutout sizes

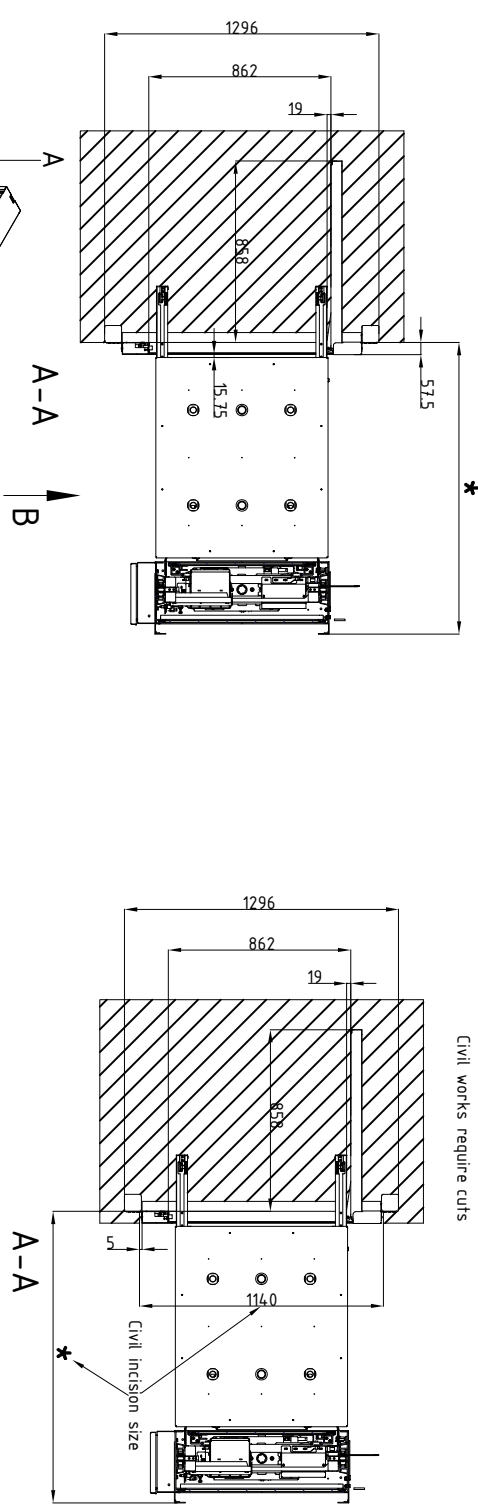

A-A

A-A

Cabin size	
Size	* (mm)
S (600X700)	1179
M (800X700)	1379
L (1000X700)	1579

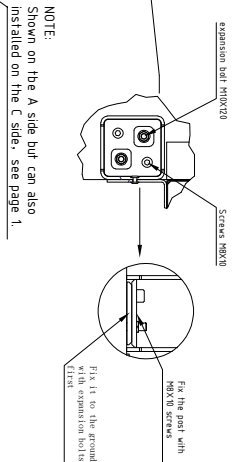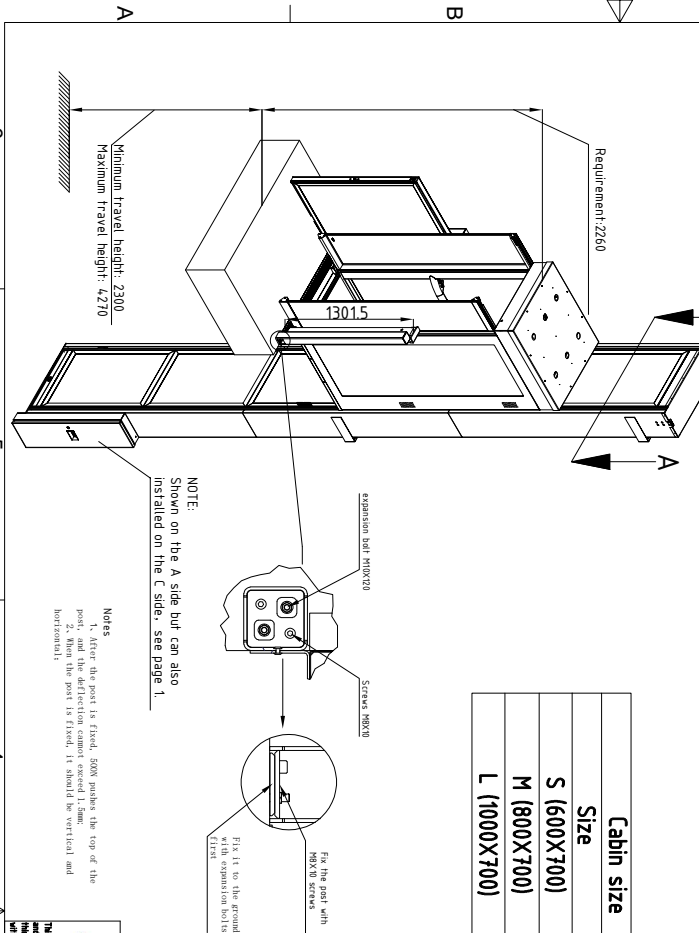

NOTE:
Shown on the A side but can also
installed on the C side. see page 1.

Notes
1. After the post is fixed, 500mm marks the top of the
post. 2. When the post is fixed, it should be vertical and
bottom horizontal.

ASCENDA

The Ascenda is the property of TFL. It is not
to be used for any other purpose, and its use
is limited to the purpose for which it was
designed. It is not to be used in any
manner that would be considered
misuse or abuse.

Resp Plan

Designer

General Tolerance

SS-ISO 2768-1

M

TFL Principal drawing

Lift All dimensions are in mm.

Scale

Filename



Date 2024-10-09

Doc number

page 7

Rev.



NOTE:
The maximum number bends is two.

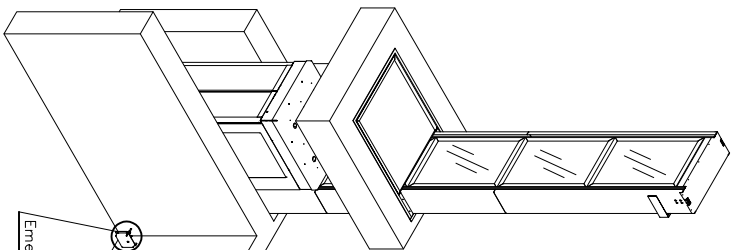

control box
NOTE:
Recommended Maximum fixing height.



Emergency Lowering Device

1

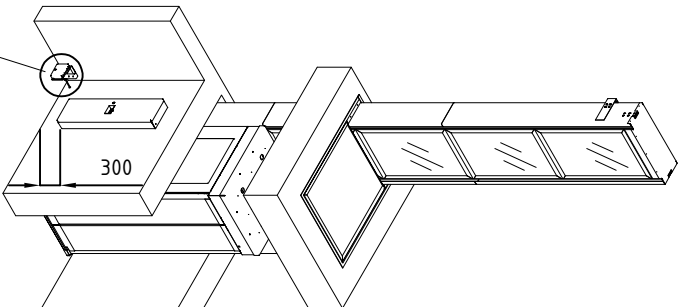


Emergency Lowering Device

2

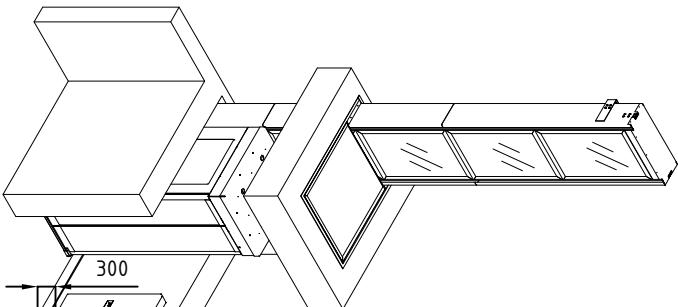

Emergency Lowering Device

3



NOTE:
Control box and handle crank distance from the lift is ≤ 3000 .

ASCENDA

This document is the property of Claeys Lift AB and must not be reproduced, disclosed to any third party or used in any unauthorized manner without written consent.

Resp Man Designer

General Tolerance
SS-ISO 2768-1
m

TFL Principal drawing

All dimensions are in mm.

Scale Filename

Date 2024-09-27

Doc number

Page 5

Rev.

A

B

C


D

A



B

C

D

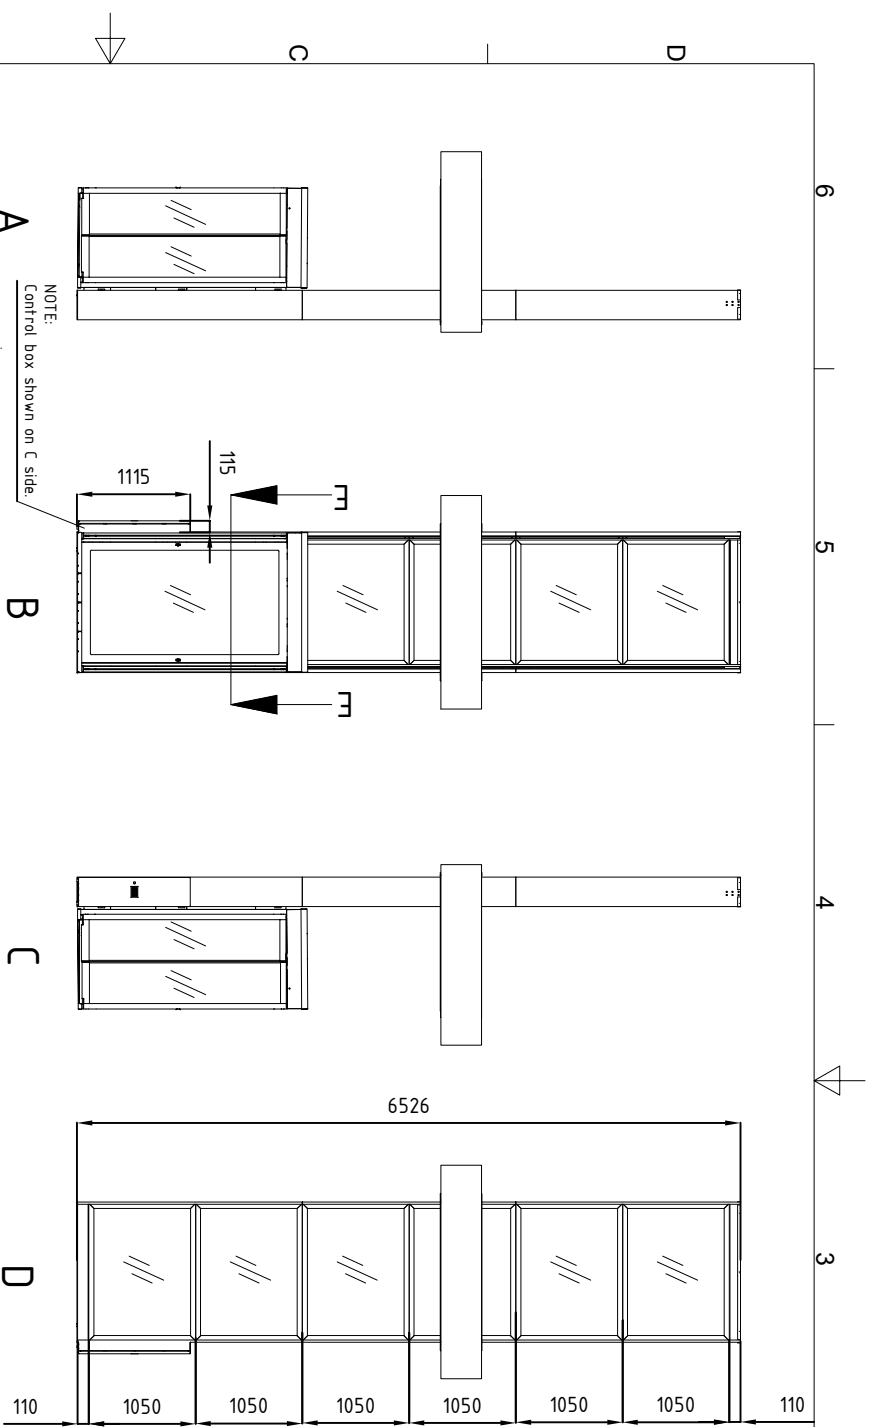





Cutout dimension see sheet 2;
Forces see sheet 3.






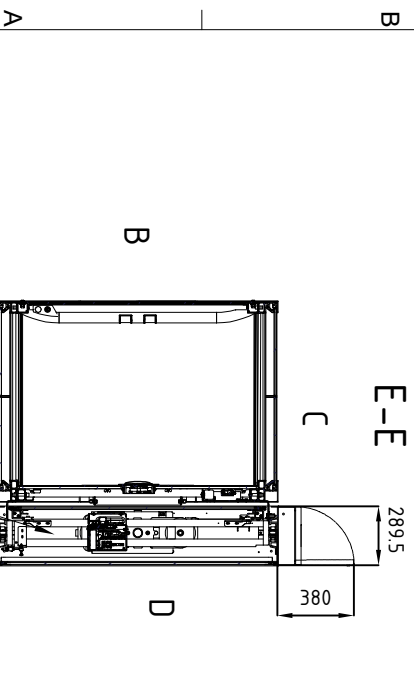
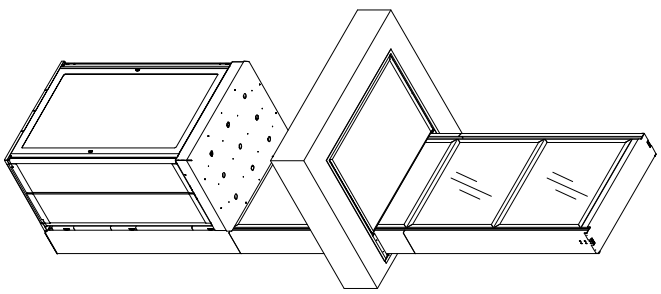


Capacity: 350 Kg
Maximum travel height: 4270m
Main Line: VAC, 1x230 50-60HZ 32A. Active phone line. Both should be available at the first/main landing.
NOTE! A lift featuring a frequency converter cannot be directly connected to a RCD.
Ambient temperature -10°C to +40°C;
Humidity Less than 95% RH, non-condensing.
This lift is for indoor use only, it should be protected from weather.

ASCENDA		TFL Principal drawing	
Resp Man	Designer	Scale	Filename
General Tolerance SS-ISO 2768-1 m		Date 2024-09-27	
This document is the property of Otis LIFT AB and must not be reproduced, disclosed to any third party or used in any unauthorized manner without written consent.		Doc number Page 1	Rev.

Cutout sizes

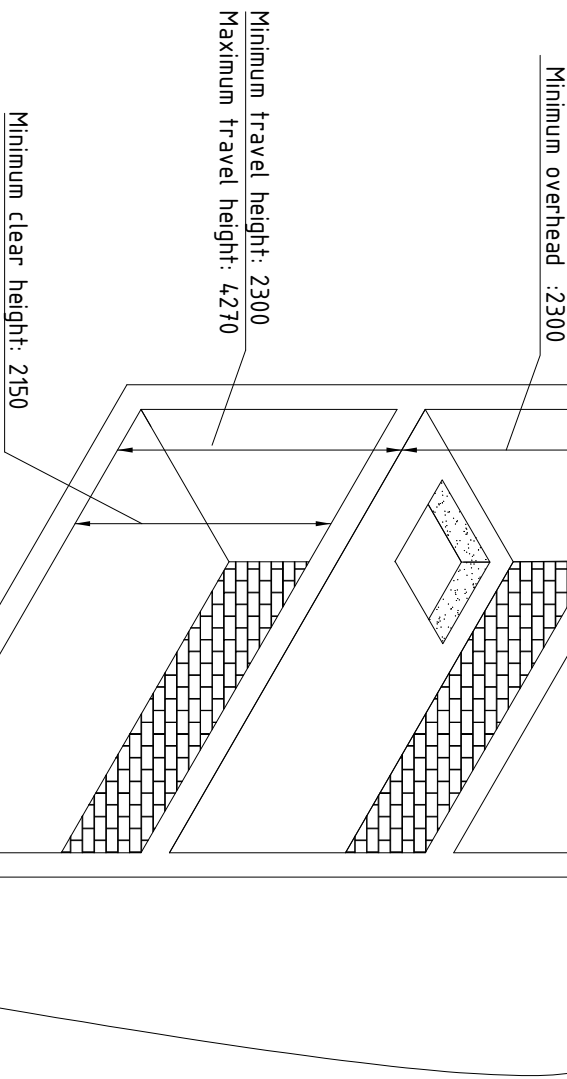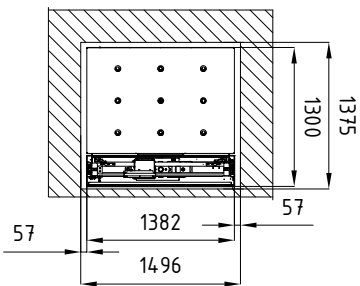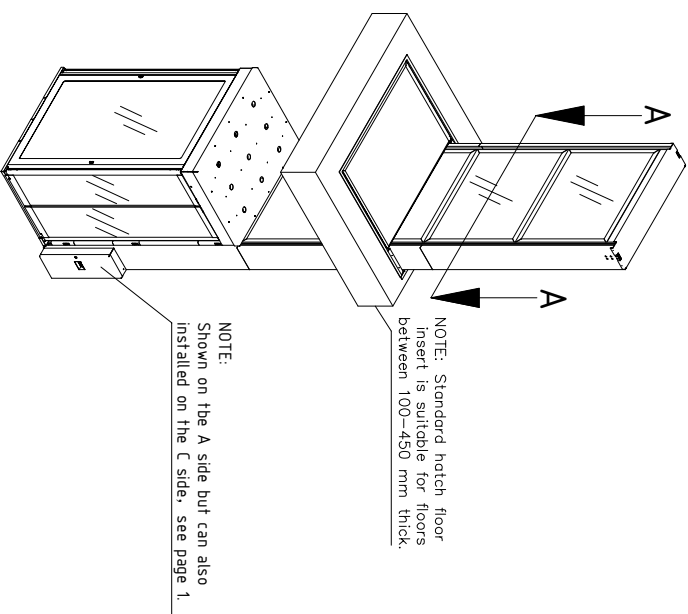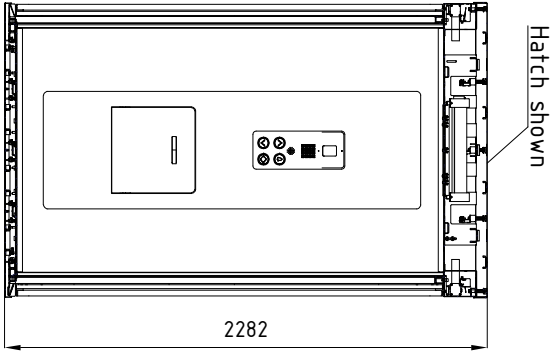

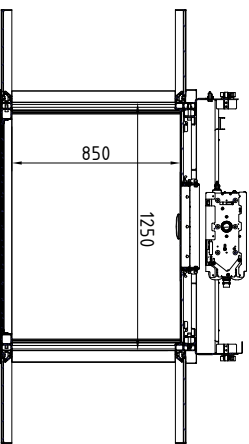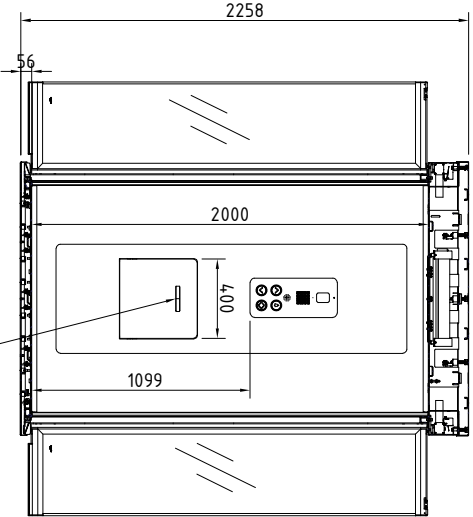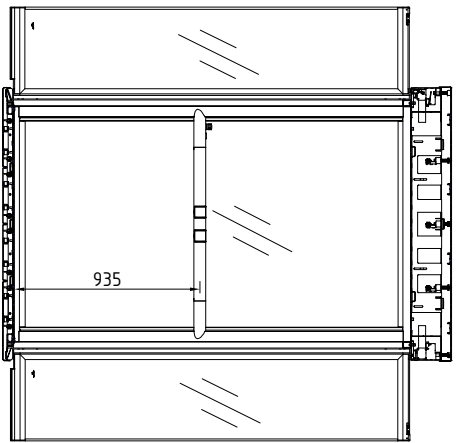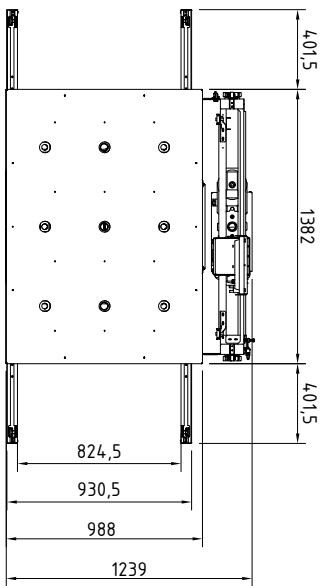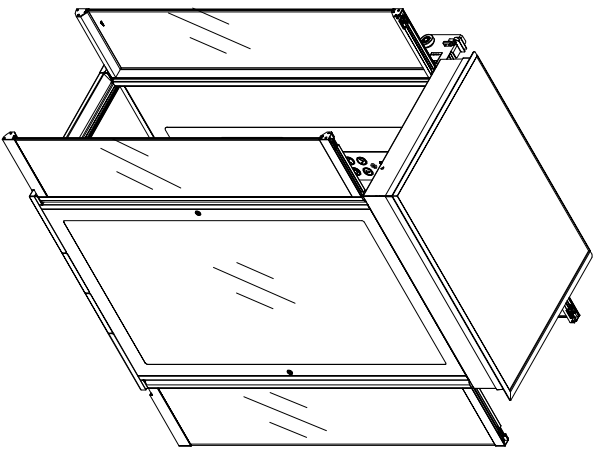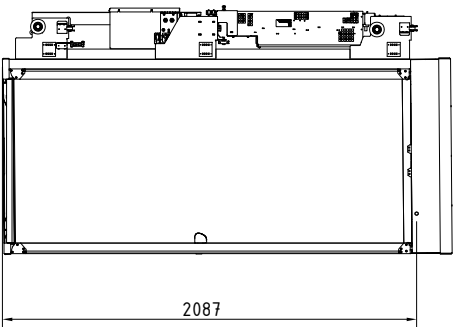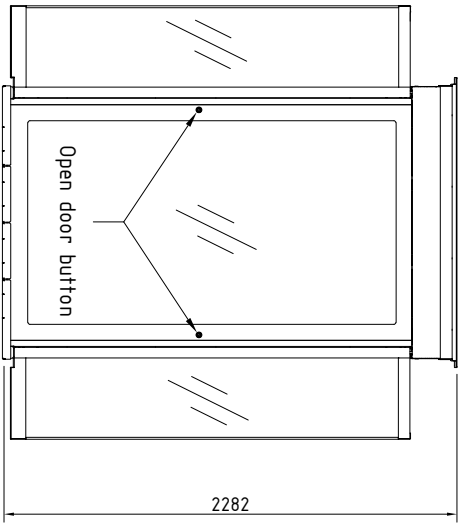


When folded down the seat dimensions are: 400 X 315 (WxD)
Seat maximum load capacity is 150kg.





ASCENDA		TFL Principal drawing		Scale		Filename	
Resp		Designer		Doc number		Date	
Plan		General Tolerance		SS-ISO 2768-1		2024-10-09	
m		All dimensions are in mm		Page 4		Rev.	

This document is the property of TFL. It is not to be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without prior written permission from TFL.

Cutout sizes

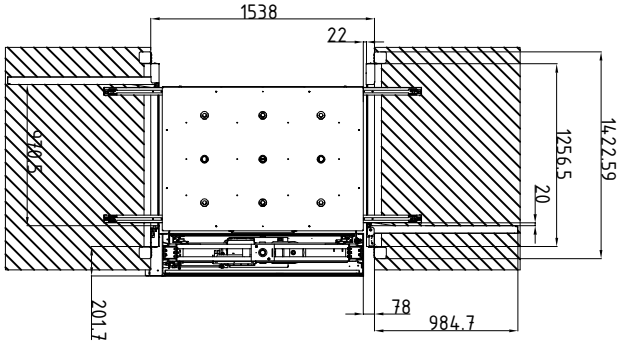

Civil works require cuts

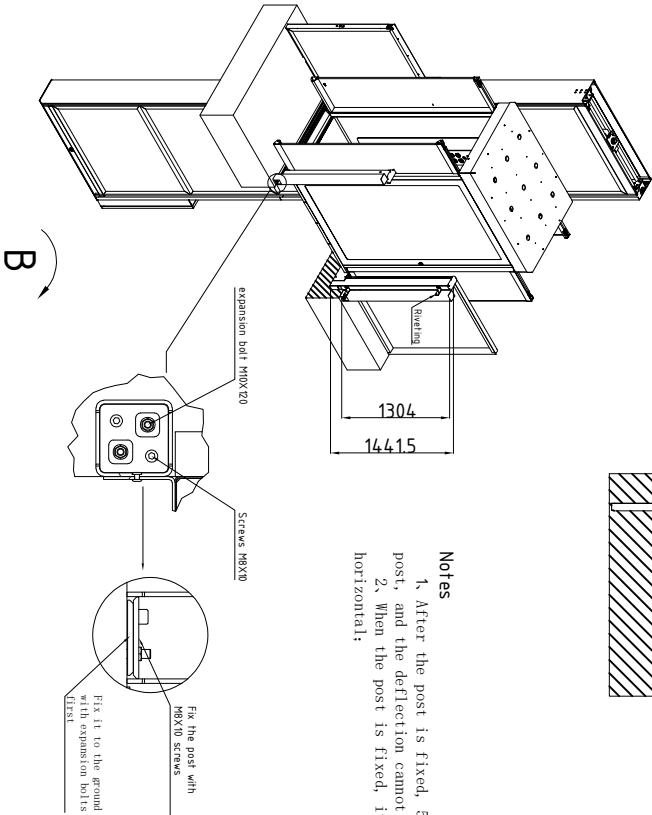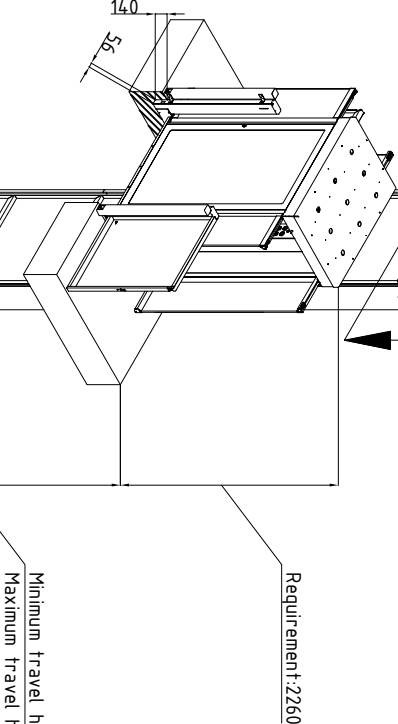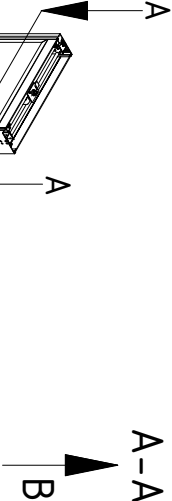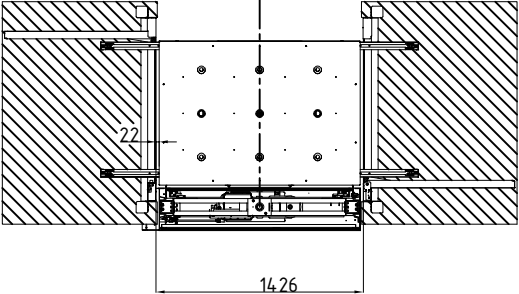

Notes
1、After the post is fixed, 500N pushes the top of the post, and the deflection cannot exceed 1.5mm;
2、When the post is fixed, it should be vertical and horizontal;

ASCENDA		Resp Man	Designer	TFL Principal drawing		Scale	Filename
The document is the property of Doka Lift AB and must not be reproduced, disclosed to any third party or used in any unauthorized manner without written consent.		General Tolerance SS-ISO 2768-1 m		Lift All dimensions are in mm.		Doc number	Date 2024-10-09
						page6	Rev.