

Hydraulic Snowblower SB300 Series



New chute design is hydraulic geared with 270 degrees of rotation



The best snow blower on the market just got better! Throw snow up to 40' while clearing paths down to the ground. Featuring a 4 bladed fan and no freeze up geared chute rotation.


17" Serrated auger with a 20" diameter 4 blade fan design



5/8" x 6" bolt-on cutting edge makes close cutting to the ground



Take a Picture of This QR Code With Your Smart Phone to See it in .

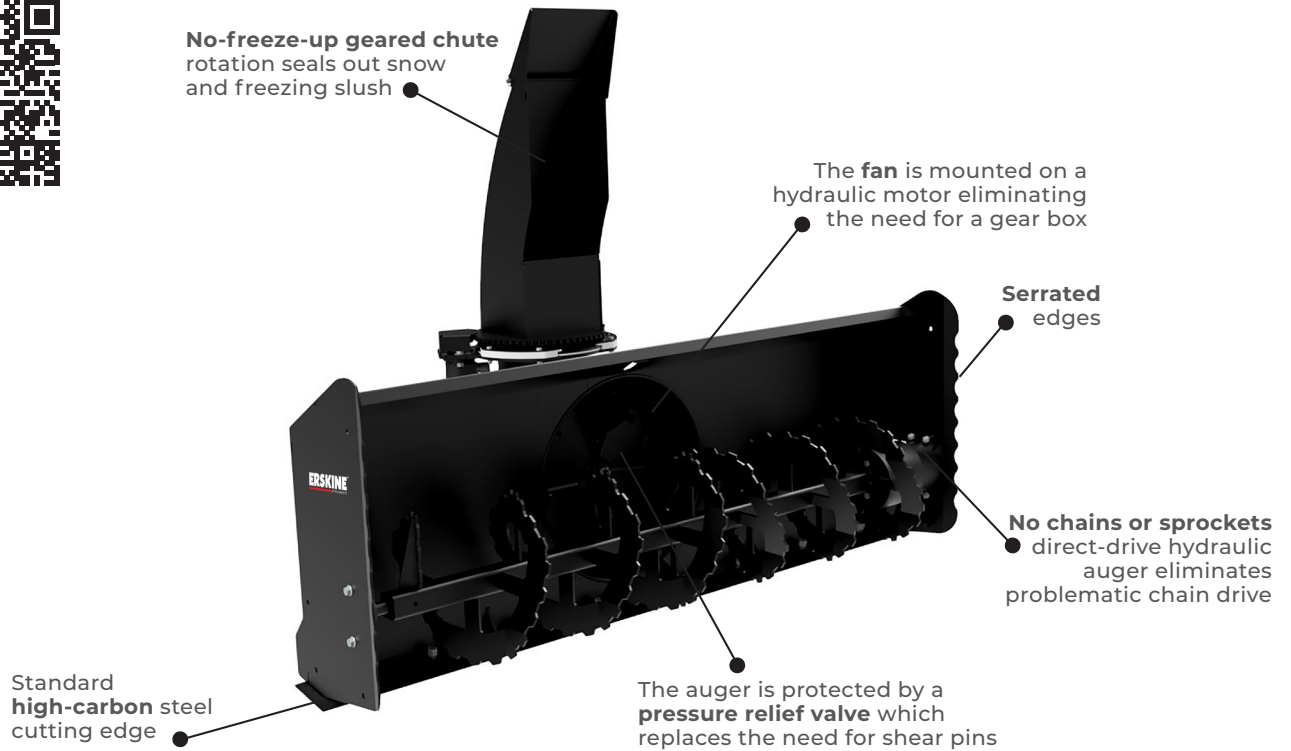

FEATURES & BENEFITS

- Patent pending 17" serrated auger chews into the hardest snowbanks
- HD geared chute with 270 degrees allows the operator to precisely place snow stream
- 4 blade fan virtually eliminates chute clogging
- Replaceable bolt-on high-carbon steel cutting edge
- Hydraulic relief - no shear pins
- Throws snow up to 40'

SPECIFICATIONS / OPTIONS

Model	SB300 - 48"	SB300 - 54"	SB300 - 60"	SB300 - 72"	SB300 - 78"	SB300 - 84"
Part Number	901695 / 901780	901697 / 901781	902699 / 901782	901702 / 901783 / 901786	901704 / 901784 / 901787	901706 / 901785 / 901788
Stage	2	2	2	2	2	2
Width of Cut	48"	55"	61"	73"	79"	85"
Cutting Height	30"	30"	30"	30"	30"	30"
Cutting Edge	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on
Auger Diameter	17" Serrated	17" Serrated	17" Serrated	17" Serrated	17" Serrated	17" Serrated
Fan Diameter	20" 4-blade	20" 4-blade	20" 4-blade	20" 4-blade	20" 4-blade	20" 4-blade
Chute Rotation	Hydraulic Geared 270°	Hydraulic Geared 270°	Hydraulic Geared 270°	Hydraulic Geared 270°	Hydraulic Geared 270°	Hydraulic Geared 270°
Pressure Relief	Auger and Fan	Auger and Fan	Auger and Fan	Auger and Fan	Auger and Fan	Auger and Fan
Casting Distance	Up to 40'	Up to 40'	Up to 40'	Up to 40'	Up to 40'	Up to 40'
Shipping Weight	750 lb.	775 lb.	810 lb.	870 lb.	890 lb.	920 lb.
Mounting Plate	Universal	Universal	Universal	Universal	Universal	Universal
Hydraulic Flow Requirement	11-22 GPM	11-22 GPM	11-22 GPM	11-28 GPM	11-28 GPM	11-28 GPM
Operating Pressure	2,500-3,500 psi	2,500-3,500 psi	2,500-3,500 psi	2,500-3,500 psi	2,500-3,500 psi	2,500-3,500 psi
Rear 6" Skid Shoes	Standard	Standard	Standard	Standard	Standard	Standard

Options

Urethane Skid Shoes / Urethane Cutting Edge / Rubber Cutting Edge / Pistol Grip Control Harness / Loader Specific Wire Harness / Factory Installed Couplers

* For more specification details please see our website www.erskineattachments.com